


Telnet Configuration


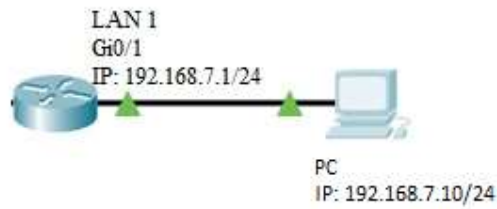


Telnet Configuration:

```
Router>  
Router> enable  
Router#  
Router_(Config)# aaa authentication login default local  
Router_(Config)# aaa authentication enable default enable  
Router_(Config)# username admin password admin  
Router_(Config)# enable password admin
```

Telnet router via Local LAN PC

Putty Configuration:

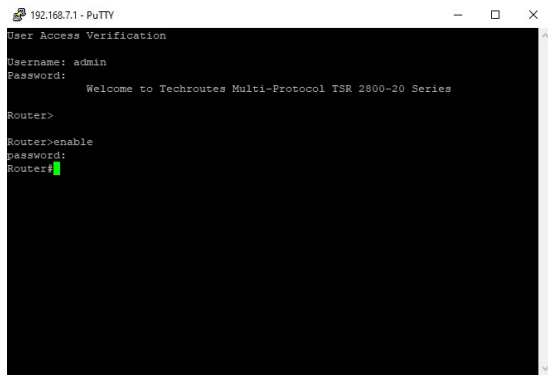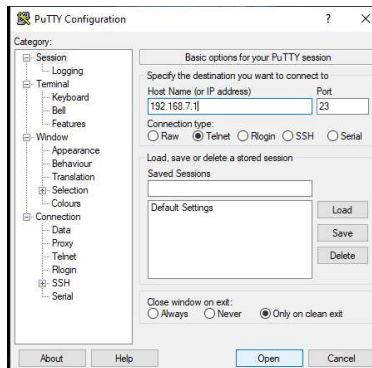

```
Router_config#  
Router_config#  
Router_config#<188>Jan 10 17:08:14 Router - 050AC880 [Core 0]: init user  
<190>Jan 10 17:08:14 Router - 050AC880 [Core 0]: User admin logged in from 192.168.7.10 on vty 0  
<190>Jan 10 17:08:18 Router - 050AC880 [Core 0]: User admin enter privilege mode from vty 0, level = 15
```